



sdi  **smart**



FUTURE ACTIVE LED DISPLAY INDOOR AND OUTDOOR

LED VIDEO WALLS, OFFERING INNOVATIVE SOLUTIONS FOR BUSINESSES, EVENTS, AND ADVERTISING. WITH A FOCUS ON QUALITY AND CUSTOMER SATISFACTION, WE'VE ESTABLISHED A STRONG REPUTATION IN THE DIGITAL DISPLAY INDUSTRY.

 **+01204114817**

 **sales@sardigitalindia.com**

 **www.sardigitalindia.com**



Indoor LED Videowalls

Outdoor LED Videowalls


Indoor & Outdoor LED Tickers

Customized LED Videowalls

Event LED Displays



FOR STUDIOS Customized LED Videowalls

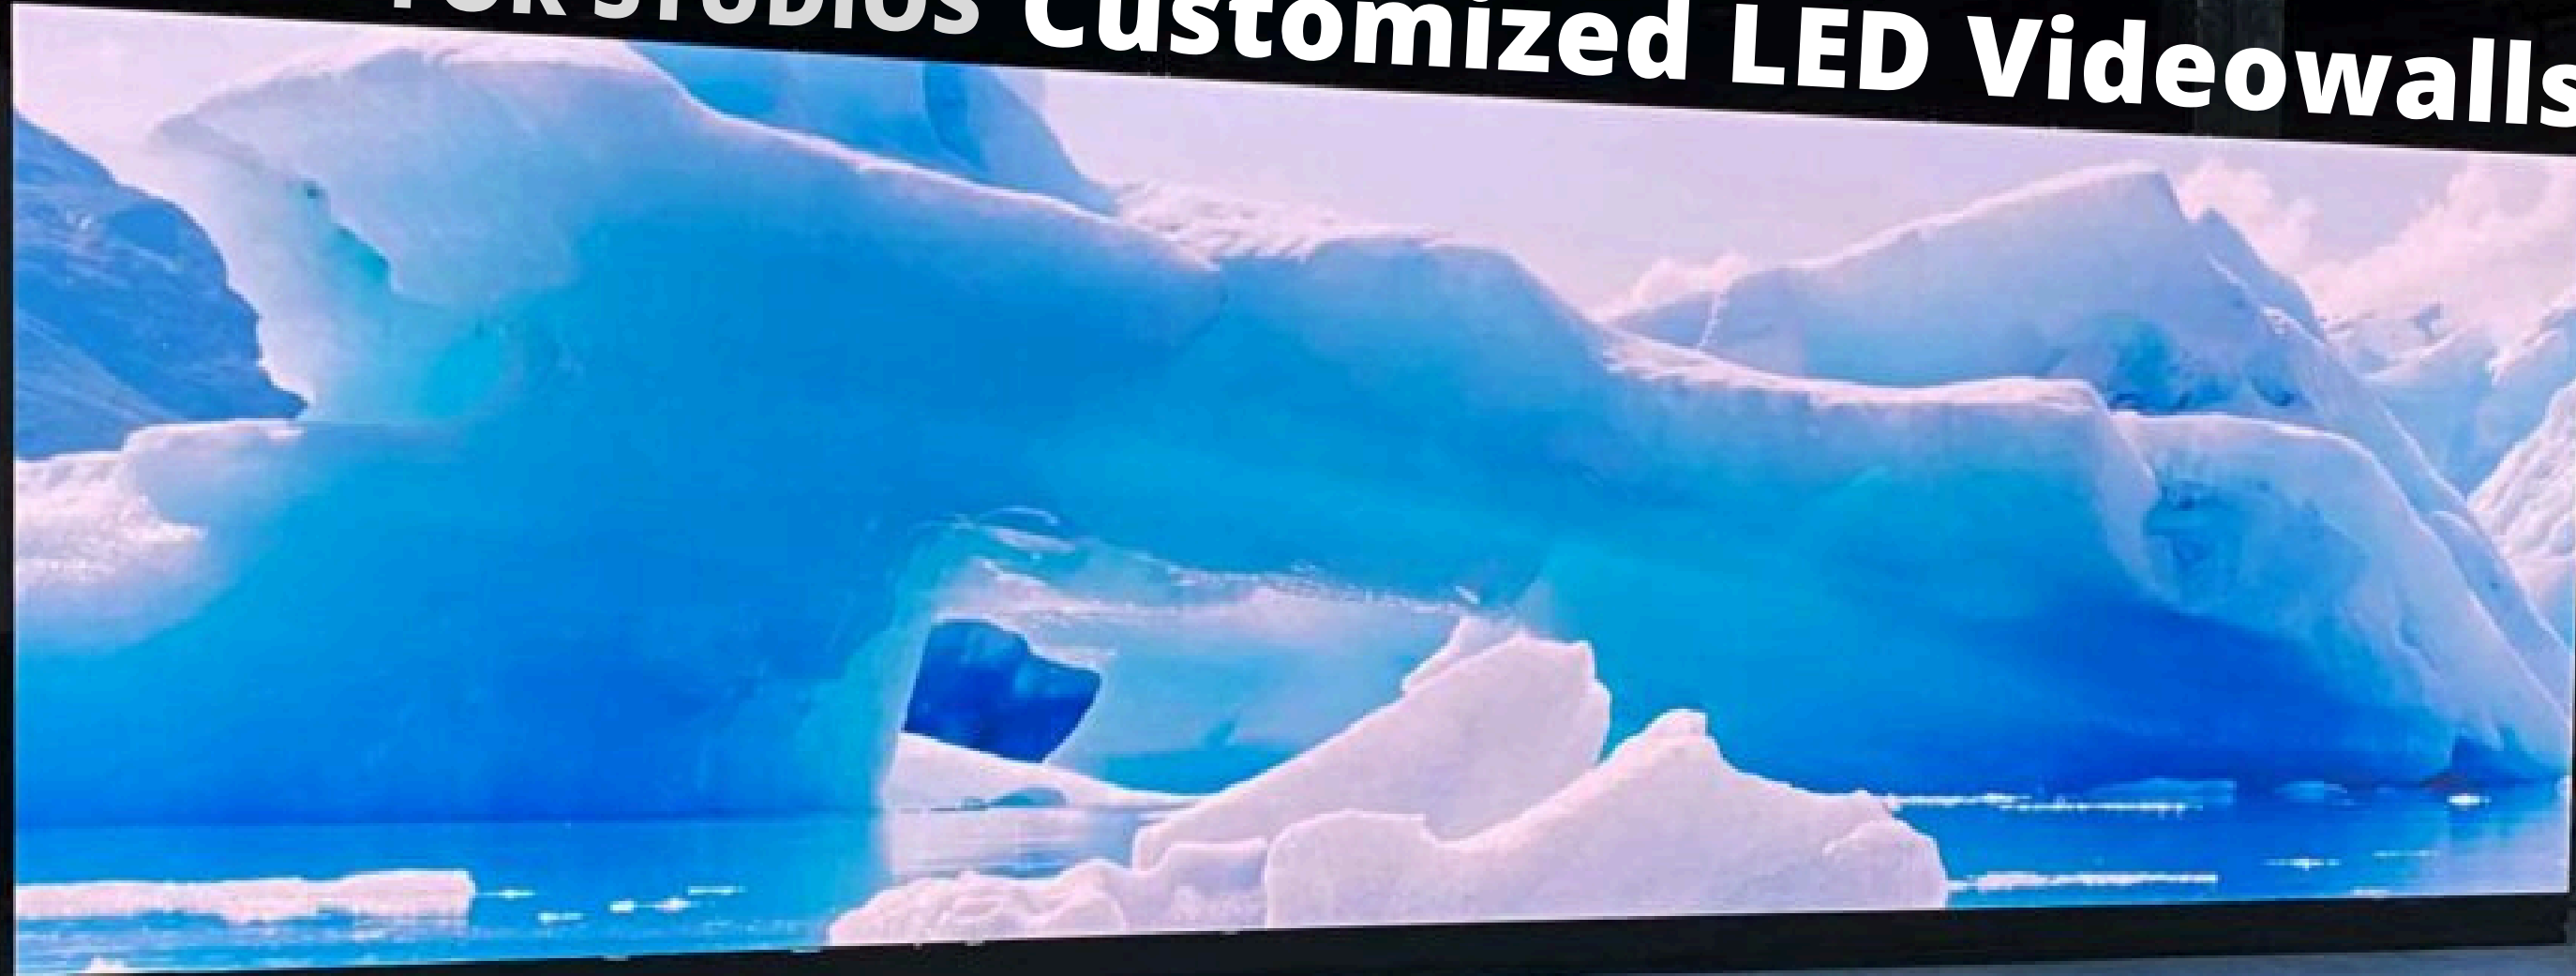

GET SET GO

 +01204114817

 sales@sardigitalindia.com

 www.sardigitalindia.com



CUSTOMIZED SERIES



- **At Government & Semi-Government Sector**
- **At PSUs**
- **At Defence**
- **At Education Sector**
- **At Advertising Sector**
- **At Transportation Hub**
- **At Sports Arenas**
- **At Broadcasting Sector**
- **At Retail Sector**



FINE PITCH SERIES

Parameters/ Model	IN-IX	IN-X2	IN-X5	IN-X8
Pixel Pitch	0.9mm	1.2mm	1.5mm	1.8mm
Brightness	≥600-1000cd/m2			
Colour Temp.	2000K-9500K Adjustable			
Cabinet Material	Die-Cast Al/ MS Cabinet			
Viewing Angle	160°/ 140°			
Maintenance	Front/ Rear			
Contrast Ratio	≥ 5000:1			
Refresh Rate	1920Hz/ 3840Hz			
Operating Temp/Humidity	-10°C to 45°C/10%-80%RH			
Storage Temp/ Humidity	-20°C to 55°C/10%-85%RH			



INDOOR SERIES



OUTDOOR SERIES

Parameters/ Model	INII-2X0	INII-2X5	INII-3X0	INII-4X0
Pixel Pitch	2mm	2.5mm	3.0mm	4.0mm
Brightness	≥ 800-1000cd/m2			
Colour Temperature	2000K-9500K Adjustable			
Cabinet Material	Die-Cast Al/ MS Cabinet			
Viewing Angle	160°/ 140°			
Maintenance	Front/ Rear			
Contrast Ratio	≥ 5000:1			
Refresh Rate	1920Hz/ 3840Hz			
Operating Temp/ Humidity	-10°C to 45°C/ 10%-80%RH			
Storage Temp/ Humidity	-20°C to 55°C/ 10%-65%RH			

Parameters/ Model	INO- 2X5	INO- 3X0	INO- 4X0	INO- 6X0	INO- 8X0	INO- XX0
Pixel Pitch	2.5mm	3.0mm	4.0mm	6.0mm	8.0mm	10mm
Brightness	5000-7000cd/m2					
Colour Temperature	2000K-9500K Adjustable					
Cabinet Material	MS Cabinet/ Die-Cast Al / Aluminium Profile Cabinet					
Viewing Angle	140°/ 140°					
Maintenance	Front/ Rear					
Contrast Ratio	≥ 4000:1					
Refresh Rate	1920Hz/ 3840Hz					
Operating Temp./ Humidity	-10°C to 50°C/ 10%-90%RH					

Customized Series





SAR DIGITAL INDIA

www.sardigitalindia.com

sales@sardigitalindia.com

+919871779199 | +919717771927